

Optionals



Divisible counterweight with automatic unloading
Zavorra scomponibile e autoscaricabile
Zerlegbares und selbst entladbares Gegengewicht
Lest démontable et auto-déchargeable



Three positions reclinable boom head
Testata inclinabile in tre posizioni
3 Positionen neigbare Krankopf
Tête inclinable dans trois positions



Hook for reclinable boom head
Supporto con gancio per testata inclinabile
Träger Doppelhaken für neigbare Krankopf
Support avec crochet pour tête inclinable



1,5 mt mechanic jib with hook
Supporto gancio da 1,5 mt
Mechanischer spitzenausleger (1,5 mt)
Support crochet de 1,5 m



Mechanic jib with pulley
Supporto carrucola
Mechanischer spitzenausleger mit Riemenscheibe
Support poulie



Reclinable trellis jib
Prolunga tralicciata inclinabile
Neigbarer Gittermast, in 2 Teilen aufgeteilt
Reclinable trellis jib



Hydraulic jib
Jib idraulico
Hydraulische Jib
Jib hydraulique



Secondary winch
Argano secondario
Sekundär Hubwinde
Cabestan secondaire



Hook blocks of various capacities
Bozzelli di varie portate
Verschiedene Unterflasche
Moufles de différentes portées



Towing winch
Verricello di traino
Zugwinde
Treuil d'entraînement




Radio control with display
Radiocomando con display
Funkfernsteuerung mit Display
Radiocommande avec afficheur



Auxiliary electric pump (380 Volt / 22 kW with inverter)
Elettropompa ausiliaria per utilizzo ecologico
380 Volt 22 kW con inverter
Elektrische Hilfspumpe mit 380V Motor (22 kW mit inverter)
Auxiliary electric pump (380 Volt / 22 kW with inverter)



60 t lift spreader beams
Bilancino da 60 t per sollevamento carichi
60 Tonne Traverselift
Palonnier de 60 t pour le levage des charges

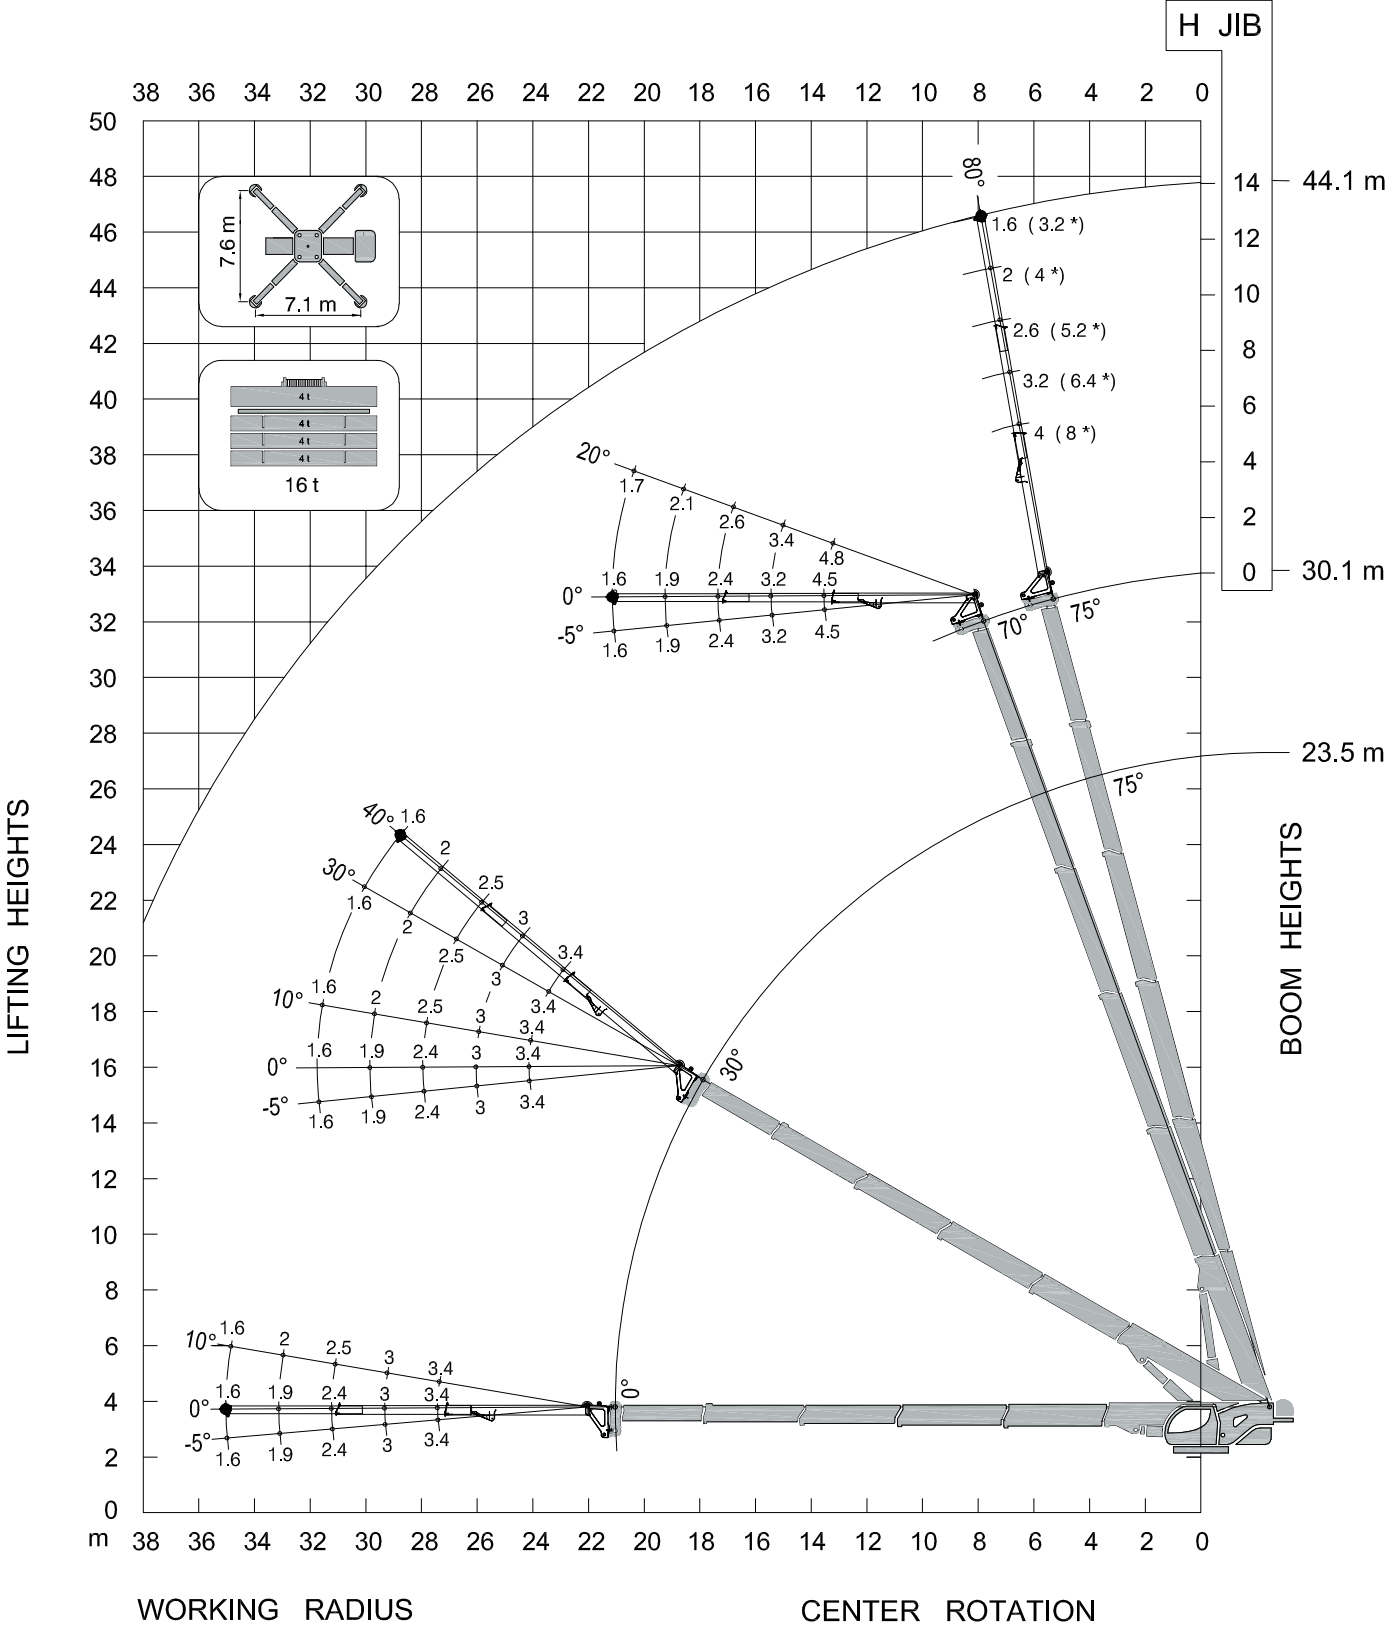

* : LIFTING CAPACITY WITH BOOM LENGTH UP TO 23,5 m